


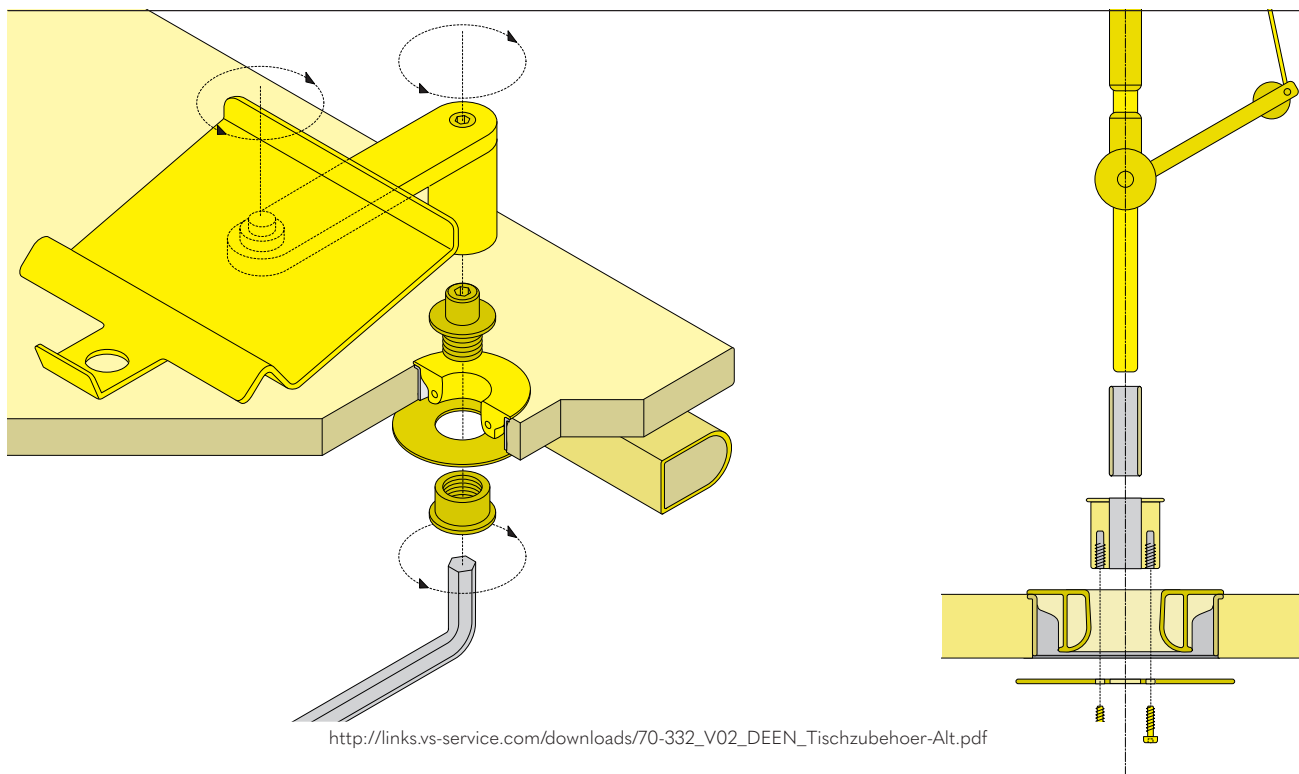

Montageanleitung

Zubehör Telefonhalter und Leuchtenbefestigungssatz

Im Internet: Sie finden diese Anleitung im Internet (siehe Kopfleiste).

Lieferumfang: Produkte werden fertig zur Montage ausgeliefert. Bei einigen Zubehörteilen ist eine separate Montageanleitung des Herstellers beigelegt. Bitte beachten.

Betrieb: Beachten Sie die Hinweise auf der folgenden Seite.

Fehlersuche und Service: Bei eventuell auftretenden Fehlern wenden Sie sich bitte an unseren Kundendienst kundenservice@vs-moebel.de

Wartung und Reinigung: Im Internet: vs.de/kataloge/reinigung/

Weitergabe: Bei Weitergabe des Produkts ist auch diese Bedienanleitung zu übergeben.

Assembly instructions

Accessories: Telephone holder and light fixing kit.

On the Web: You can find these Instructions on the Web.

Scope of delivery: The products are supplied ready for assembly. In the case of some accessory parts, the manufacturer's instructions are enclosed separately. Please note.




Use: Please take account of the notes on the following page.

Faults and service: If any faults occur, please contact our Customer Service: kundenservice@vs-moebel.de

Maintenance and cleaning: On the Internet: vs.de/kataloge/reinigung/en

Product transfer: If the product is transferred to a new owner or user then it must be accompanied by these Instructions.





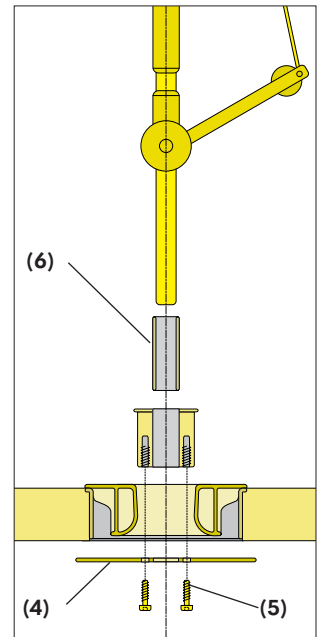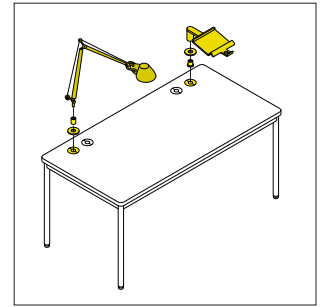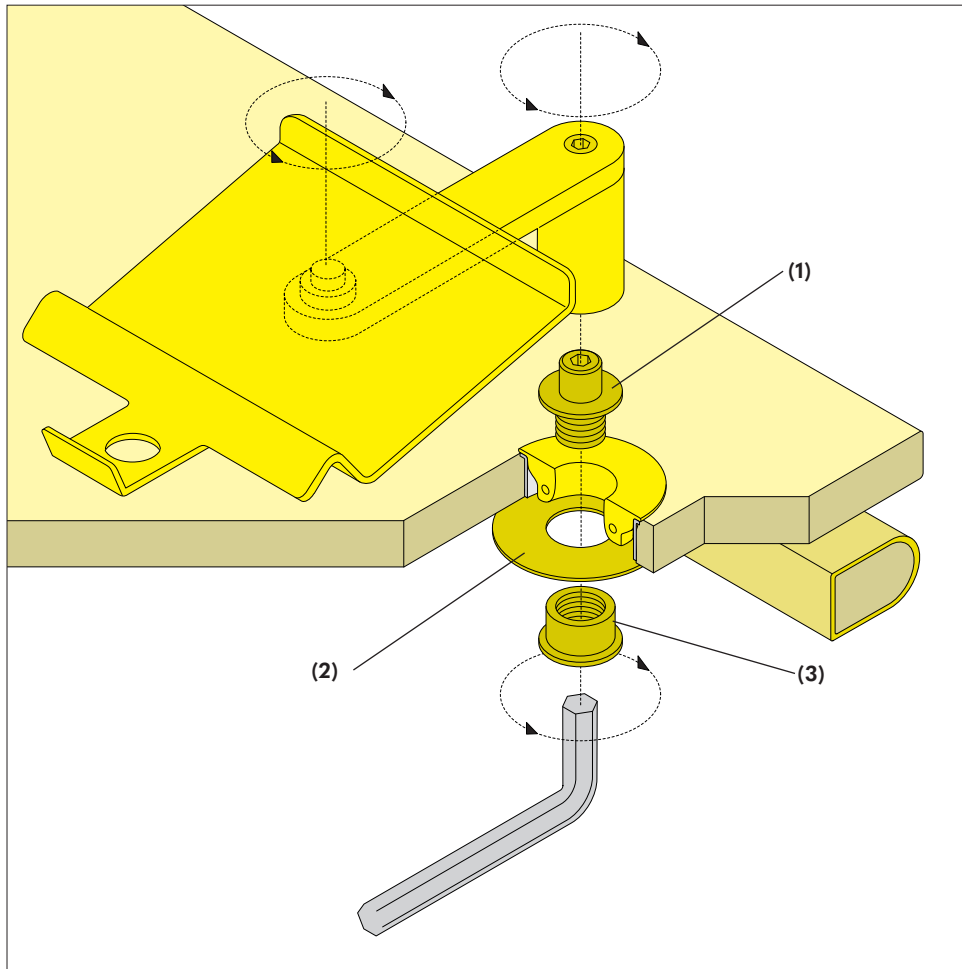

Telephone holder

Insert the bolt **(a)** with integrated washer in the cable outlet provided. From below the table, place the washer **(b)** in position and screw on the nut **(c)**. Screw the parts together from above and below using a size 10 Allen key. Mount the telephone holder with rotating sleeve.

Light fixing kit. Place the light holder in the cable outlet provided. From below the table, place plate **(d)** in position and screw together using three M4x12 Allen screws **(e)**. Depending on the type of light, it may be necessary to slide a sleeve **(f)** into the holder.

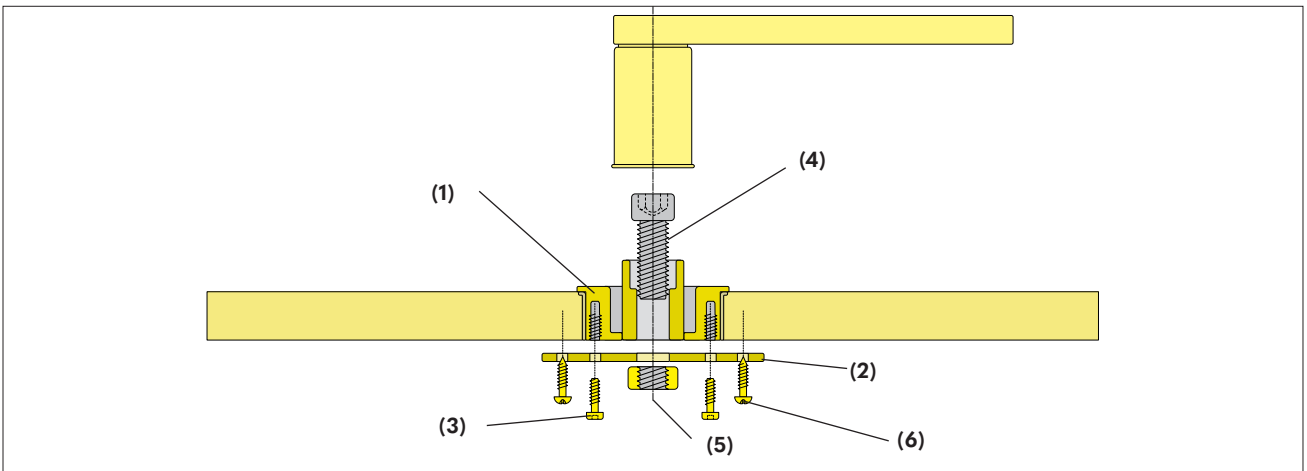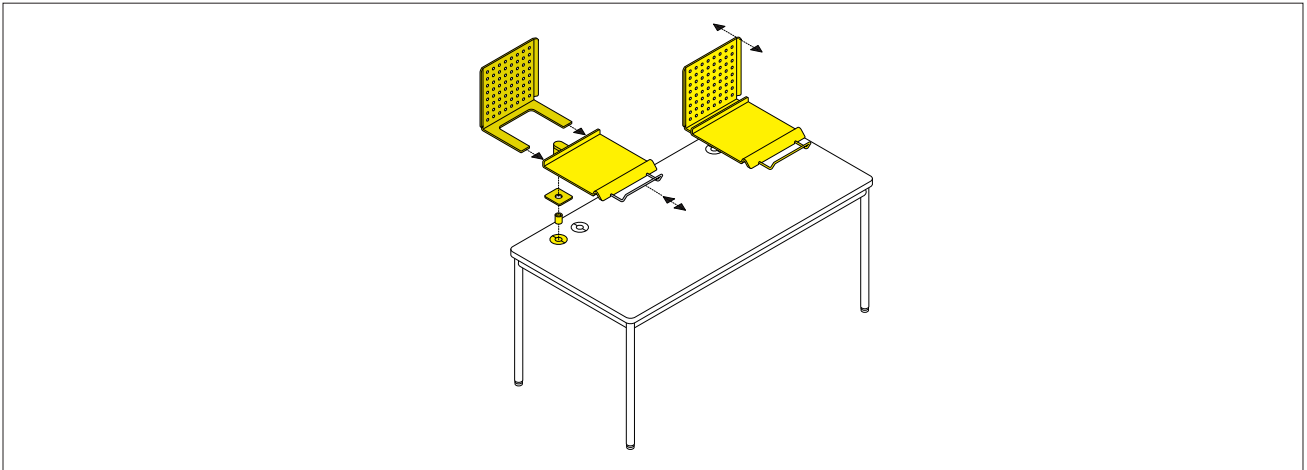

Monitor station.

Place bearing **(a)** in the cable outlet provided. From below the table, place retaining plate **(b)** in position and screw together using three M6x16-mm screws **(c)**. Insert bolt **(d)** and screw the M16 mm nut on securely from below **(e)**, and screw the M16 mm nut on securely from below **(f)**. Mount the monitor holder with rotating sleeve.

If the monitor holder has a cover, this is pushed on from behind and is fixed in place with a knurled nut.